

PE6000

Vehicle Computer



Rugged and reliable Intel® Computer Unit

The PE6000 Intel® Computer Unit is a sealed, conduction-cooled, military computer based on a standard Intel® processor, that can be networked and attached to military keyboards and displays to provide full computing power.

Perserveres in the most rugged environments, this compact computer uses common operating systems including Windows XP, LINUX, and more.

Provides a full suite of processing power, storage, and standard I/O through the circular military connectors.

Features:

- Pentium-based computing.
- Solid state storage.
- Flexible I/O including audio interface for intercom.
- Uses common operating systems: Windows XP, LINUX, and more.
- Convenient mounting holes, and optional mounting kit ensures low-profile mounting.
- ISO compliant CAN interface allows efficient transfer rates.
- Compact and sealed EMI-compliant enclosure.

Technical Information

Processor Unit

CPU	Intel® Celeron M 1.06 GHz Intel® Core™ 2 Duo 1.06 GHz
CPU L2 Cache	1 MB to 2 MB
Memory	1 GB (Optional growth up to 2 GB)
Video Controller	Intel® Graphics Media Accelerator 950 Max. resol. CRT = QXGA 2048 x 1536 Max. resol. LCD= UXGA 1600 x 1200
Video Memory	224 MB Max
Hard Disk	32 GB (Upgradeable 64 GB, 128 GB) SATA Solid State Drive
Keyboard Port	USB
Video Port	VGA
Serial Ports	Three configurable as RS-232 or RS-422 Meets EIA/TIA and CCITT specifications
Audio (optional)	Audio Out AC '97 and SoundBlaster Pro™ compatible MIC/Line IN
USB	3 x USB 1.1/2.0 Ports (UHCI and EHCI) USB legacy keyboard support USB floppy, CD-ROM, Hard Drive and Memory Stick boot support
Ethernet	2 x 10/100/1000 BaseT
OS Support	WinNT, Win98, Win2K, WinXP
CANBus (optional)	ISO 11898-compliant CAN interface allows transfer rates up to 1 Mbits/s


Operator Interface	16 button switch panel (backlit)
Power Supply	MIL-STD-1275D 6 V Initial Surge, 16 V cranking Reverse polarity protection

Physical Characteristics

Size	6.00" w x 10.12" h x 2.66" d (without mounting provisions & connectors) 6.29" w x 12.04" h x 2.66" d (with mounting provisions & connectors)
Weight	9.5 lbs (4.30 kg)
Connectors	Sealed

Environmental Conditions

Operating Temperature	-40°C to +52°C (-40°F to +126°F)
Storage Temperature	-40°C to +71°C (-40°F to +160°F)
Vibration	Tracked/Wheeled Vehicles
Shock	40 g, 6 msec 1/2 sine
Water Tightness	50 PSIG
Altitude	15000 ft
Humidity	3% to 100% condensing
Sand Dust	20 mph for 30 min
Explosive Atmosphere	Yes
Salt Fog	48 hrs
EMI/EMC	MIL-STD-461E

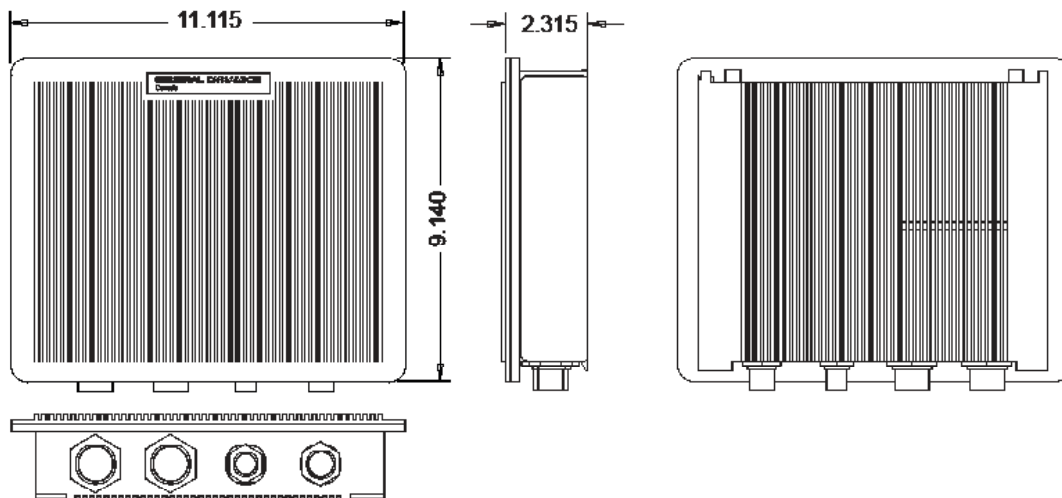

GENERAL DYNAMICS
Mission Systems

CANADA
gdmissionsystems.ca
info@gd-ms.ca

UNITED KINGDOM
gd-ms.uk
enquiries@gd-ms.uk

